


VBM

Light Impact Vibrator

PERFORMANCE DATA								
MODEL		FREQUENCY	FORCE OUTPUT	UN-BALANCE	H P	AMP DRAW	STARTUP CURRENT MULTIPLIER	WEIGHT
		rpm	lbs	in-lbs	hp	Amp 115V		lbs
VBM1/36/70	Single-Phase	3600	68	0.19	0.040	0.25	0.6	3.5
						Amp 230V		
VBM3/36/70	Three-Phase	3600	68	0.19	0.055	0.29	0.7	3.5

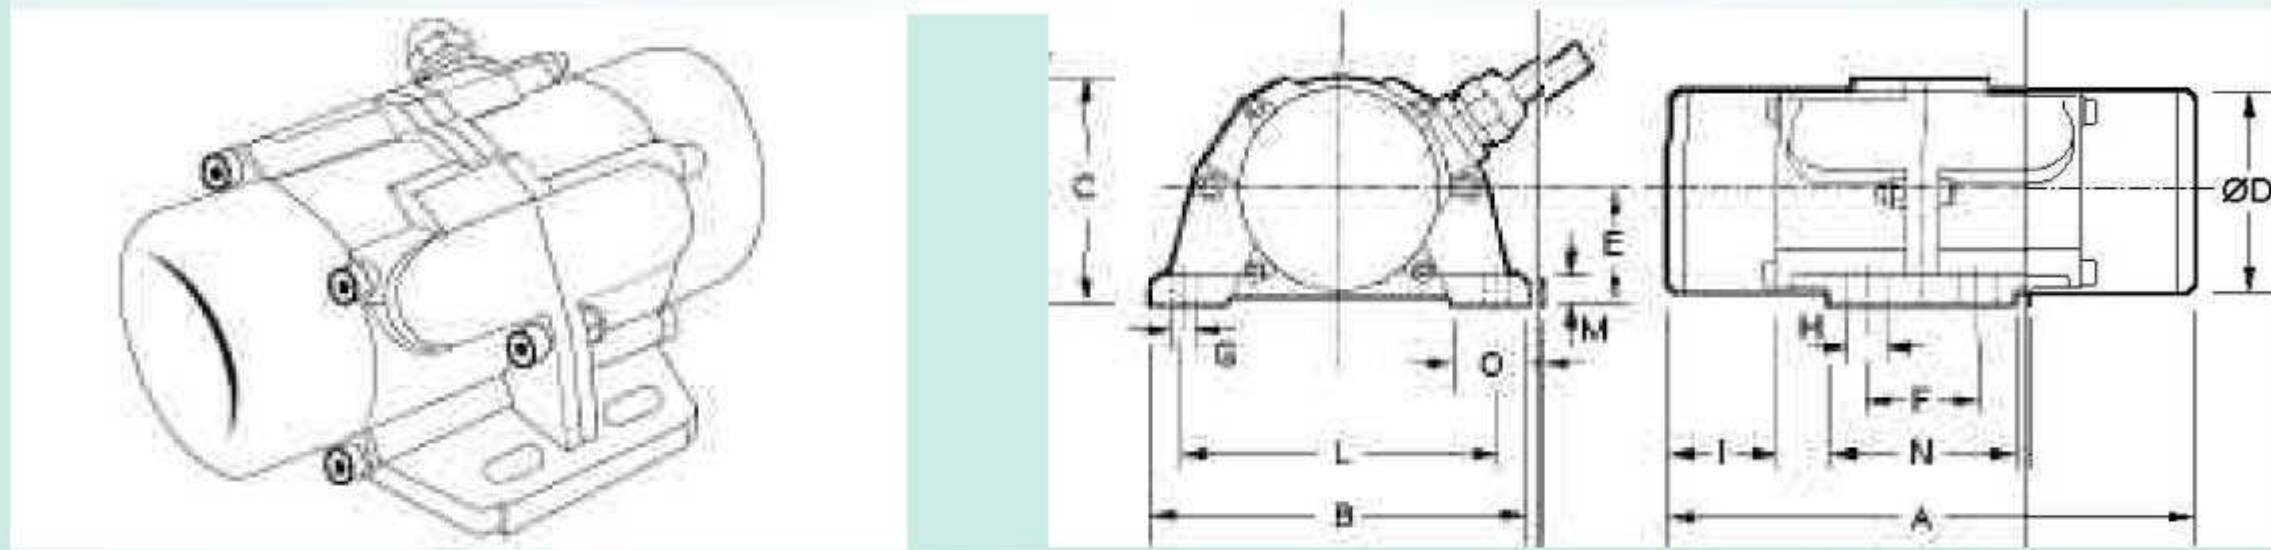

DIMENSIONS													
MODEL	A	B	C	D	E	F	G	H	I	L	M	N	O
VBM1/36/70	5.75	4.37	2.64	2.40	1.30	1.26	0.28	0.51	1.26	3.62	0.35	2.13	0.83
VBM3/36/70	5.75	4.37	2.64	2.40	1.30	1.26	0.28	0.51	1.26	3.62	0.35	2.13	0.83



The VBM has been designed for all the applications where only a light force is required.

Ideal for feeding, screening and compacting in pharmaceutical, food and chemical applications.



Lower noise (60 dba) and lower consumption (40 watts) makes it a viable alternative to many pneumatic vibrators.

It comes standard with capacitor and 5' cable. Force is adjustable from 11 to 68 lbs.

CHICAGO VIBRATOR PRODUCTS
642 NEWPORT AVENUE
WESTMONT, IL 60559
800-842-7284
630-920-9411
www.chicagovibrator.com
solutions@chivib.com