
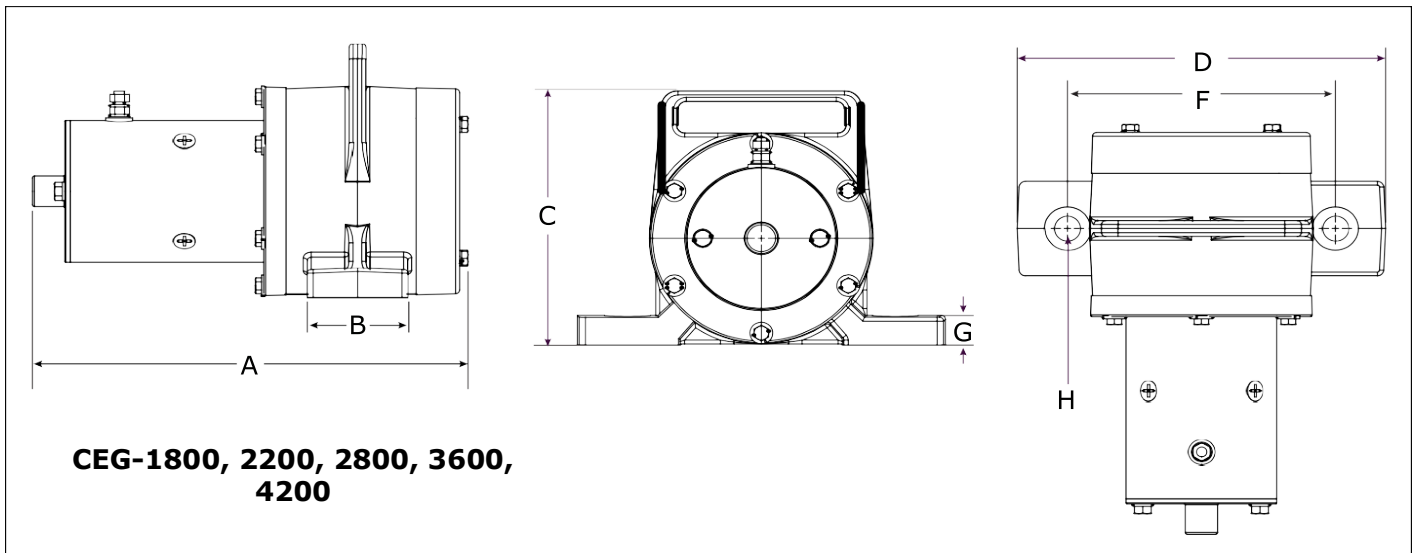


12 & 24 Volt DC Quiet Thunder® Electric Vibrators Performance Data

Vibrator Model	Unbalance			Speed	Force			Voltage	Amp Draw
	Min	Med	Max		Min	Med	Max		
	lb-in	lb-in	lb-in	rpm	lb	lb	lb	Volts	Amps
	kg-mm	kg-mm	kg-mm		kN	kN	kN		
CEG-400-12	N/A	N/A	0.55	5400	N/A	N/A	455	12V DC	25
			6				2.03		
CEG-800-12	N/A	N/A	1.02	5400	N/A	N/A	845	12V DC	25
			12				3.76		
CEG-1200-12	N/A	N/A	1.41	5400	N/A	N/A	1168	12V DC	25
			16				5.19		
CEG-400-24	N/A	N/A	0.55	5400	N/A	N/A	455	24V DC	10
			6				2.03		
CEG-800-24	N/A	N/A	1.02	5400	N/A	N/A	845	24V DC	10
			12				3.76		
CEG-1200-24	N/A	N/A	1.41	5400	N/A	N/A	1168	24V DC	10
			16				5.19		
CEG-1800-12	1.50	2.00	2.50	5000	1065	1420	1775	12V DC	60
	17	23	29		4.74	6.32	7.90		
CEG-2200-12	2.00	2.50	3.00	5000	1420	1775	2130	12V DC	60
	23	29	35		6.32	7.90	9.47		
CEG-2800-12	2.50	3.00	4.00	5000	1775	2130	2840	12V DC	60
	29	35	46		7.90	9.47	12.63		
CEG-3600-12	3.00	4.00	5.00	5000	2130	2840	3550	12V DC	60
	35	46	58		9.47	12.63	15.79		
CEG-4200-12	4.00	5.00	5.89	5000	2840	3550	4182	12V DC	60
	46	58	68		12.63	15.79	18.60		

CEG 12 & 24 Volt Series Vibrator Dimensions

VIBRATOR MODEL	Weight	A	B	C	D	F	G	H
		Total Length	Foot Width	Total Height	Total Width	Bolt Hole Separation Width	Foot Thickness	Bolt Hole Size
	lb	in	in	in	in	in	in	in
	kg	mm	mm	mm	mm	mm	mm	mm
CEG-400, 800, 1200 12 Volt	16.0	10.05	1.50	6.12	6.63	5.50	5.09	0.44
	7.3	10	38	155	168	140	129	11
CEG-400, 800, 1200 24 Volt	16.0	10.05	1.50	6.12	6.63	5.50	5.09	0.44
	7.3	255	38	155	168	140	129	11
CEG-1800, 2200, 2800, 3600, 4200 12 Volt	56.0	13.01	3.00	8.04	11.00	8.00	0.94	.78
	25.4	330	76	204	279	203	24	20

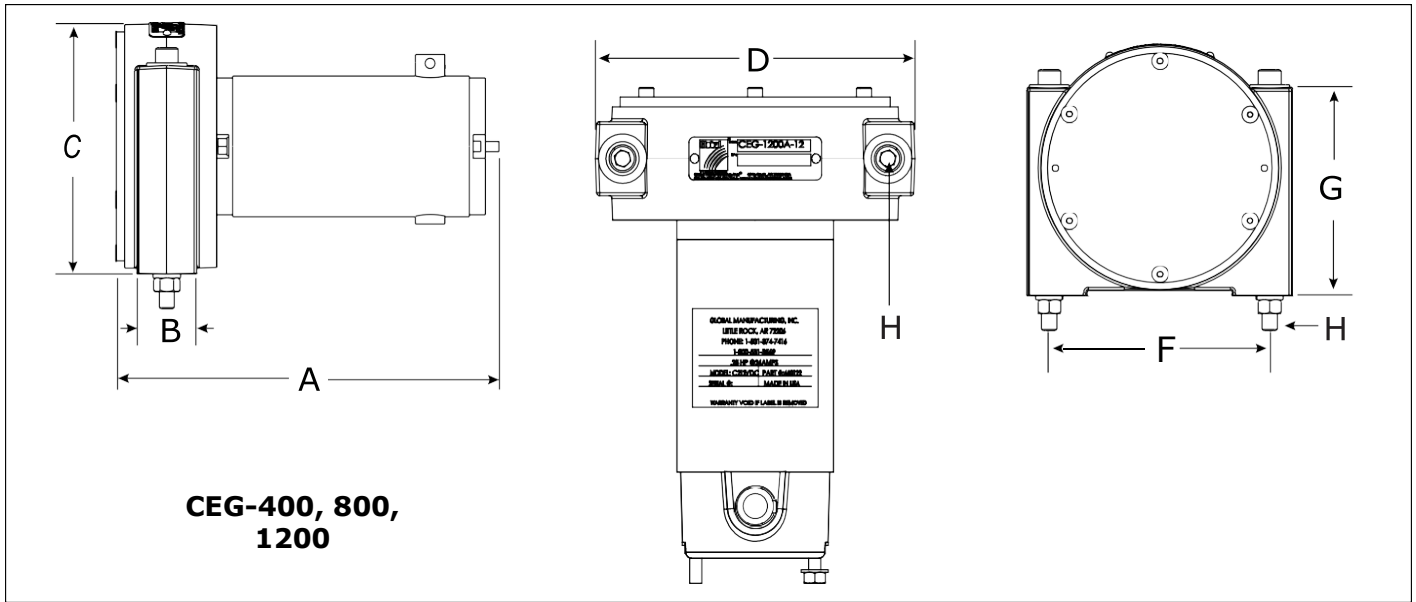

Distributed By:



ChicagoVibratorProducts
Flow and Compaction
 Division of CVP Group
 800-842-7284 (P)
 866-247-7538 (F)
 Solutions@ChiVib.com
 www.ChicagoVibrator.com